










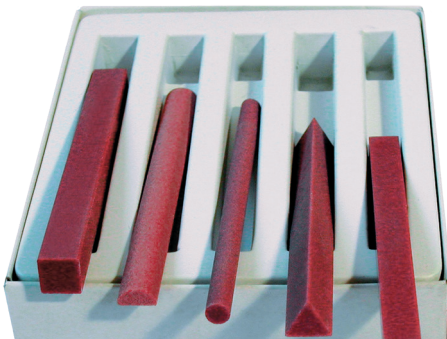


Oxydkeramikfeilen.

Besonders geeignet für Abzieharbeiten an Schnittwerkzeugen.
Kann trocken oder mit Schleiföl verwendet werden.

Länge 100 mm

	Profil mm	Bestell-Nr fein	Bestell-Nr mittel
	4 x 4 x 4	-	234-2002
	6 x 6 x 6	-	234-2012
	8 x 8 x 8	234-2023	234-2022
	4 x 4	-	234-2102
	6 x 6	-	234-2112
	8 x 8	234-2123	234-2122
	6 x 3	234-2203	234-2202
	8 x 6	234-2213	234-2212
	Ø 4	234-2703	234-2702
	Ø 6	234-2713	234-2712
	Ø 8	234-2723	234-2722




Sortiment

234-3000

Oxydkeramikfeilen

Oxidkeramische Feile aus einem Mischkristall mit außergewöhnlicher Härte. Bindemittelfrei und extrem formbeständig. Sehr gut geeignet für die Verwendung in Ultraschallpoliergeräten.

Profil mm	Länge mm	Bestell-Nr mittel	
1 x 1	50	234-4000	■
2 x 2	100	234-4030	■
2 x 2 x 2	50	234-4020	▲
3 x 3 x 3	100	234-4130	▲
∅ 1	50	234-4010	●
∅ 2	100	234-4040	●
∅ 3	100	234-4050	●
3 x 0,3	50	234-4060	—
4 x 2	100	234-4070	◐
4 x 1,5	100	234-4110	◐
5 x 1,5	100	234-4090	▲

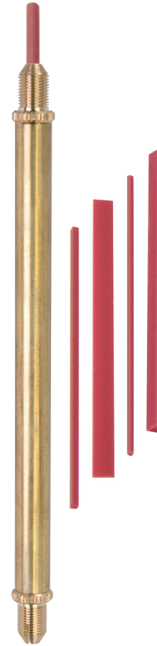

Sortiment
inkl. Halterung

11 Stk 234-4200

